



TranspumpServ
GLOBAL PVT LTD

SEWAFLOW (TsewX)

PORTABLE SEWAGE PUMP – TP SERIES

NON- CLOG SEWAGE PUMP – TN SERIES

HEAVY-DUTY NON- CLOGSEWAGE SUBMERSIBLE PUMP – TH SERIES



TECHNICAL SPECIFICATIONS

- Flow Rate: Up to 10,000 LPM
- Max. Head: Up to 60 meter
- Temperature: 45°C
- Delivery Outlet: 50mm to 150mm
- Solid Handling Capacity: 25mm to 100mm
- Connection: DOL, Star-Delta or ATS
- Supply: 415 Volts in 3 Phase and 230 Volt in Single phase with 50Hz Frequency
- Insulation: 'F' Class
- Protection: IP68
- Cable: Double Sheathed Flexible Copper PVC Insulated Cable (10 Metre Standard)






TP SERIES PORTABLE SEWAGE SUBMERSIBLE PUMP

KEY SPECIFICATIONS

- Horse Power (HP) :- 1.5 HP to 5 HP
- Rotational Speed :- 2880RPM
- Single and Three Phase Both Available

PERFORMANCE CHART OF SP SERIES

PORTABLE SEWAGE SUBMERSIBLE PUMP 2880 RPM

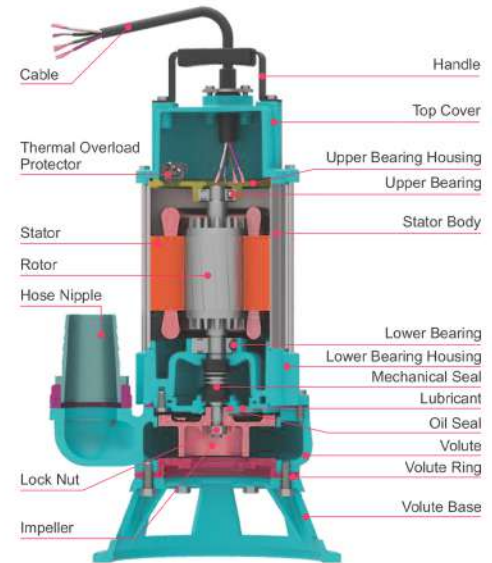

Sr. No.	Phase	Model	HP	KW	Delivery Outlet	Solid Hanging capacity	Conn ection	HEAD IN METER											
									4	6	8	10	12	14	16	18	20	22	24
1	Three	2TP1.5T	1.5	1.1	50mm	25mm	DOL	DISCHARGE IN LPM	450	350	300	250	250	100	0/16				
2	Three	2TP2T	2	1.5	50mm	25mm	DOL		500	480	400	360	360	210	110	50	0/19		
3	Three	2TP3T	3	2.2	50mm	25mm	DOL		580	530	440	380	380	250	200	100	50	0/22	
4	Three	3TP3T	3	2.2	75mm	35mm	DOL			1050	900	650	650	380	250	100	0/19		
5	Three	3TP5T	5	3.7	75mm	35mm	DOL			1350	1250	1100	1100	790	630	500	340	180	0/24
6	Single	2TP1.5S	1.5	1.1	50mm	25mm	DOL		360	280	240	200	200	80	0/15				
7	Single	2TP2S	2	1.5	50mm	25mm	DOL		450	360	320	270	270	105	0/17				
8	Single	2TP3S	3	2.2	50mm	25mm	DOL		500	480	400	370	370	220	140	0/18			
9	Single	3TP5S	5	3.7	75mm	35mm	DOL			1050	900	650	650	320	200	50	0/19		

Our single phase pumps comes with panel as capacitor is kept inside the panel

Our all model pumps come with double seated felxible copper cable having length of 10 meter each

APPLICATIONS:-

Basements, Hotels, Swimming Pools, Ponds, STP, ETP, Water Treatment Plants, Dairy, Excavation, Tunnels, Pond, River, Canal, Chemical Industries, Food Beverages, Railway, Municipality, Construction Sites, Pits, Farm House, Utility.



TN SERIES NON-CLOG SEWAGE SUBMERSIBLE PUMP

KEY SPECIFICATIONS

- Horse Power (HP) :- 7.5 to 50 HP
- Rotational Speed :- 2880RPM
- 3 Phase Only

PERFORMANCE CHART OF TN SERIES

PORTABLE SEWAGE SUBMERSIBLE PUMP 2880 RPM

Sr. No.	Model	HP	KW	Delivery Outlet	Solid Hanging capacity	Conn ection	HEAD IN METER													
								6	10	12	15	18	20	25	28	30	35	40	45	50
1	4TN7.5	7.5	5.6	100mm	40mm	DOL	DISCHARGE IN LPM	2300	2000	1700	1410	1000	400	0/22						
2	4TN10	10	7.5	100mm	40mm	DOL/SD		2400	2100	2000	1650	1200	800	350	0/28					
3	4TN15	15	11.2	100mm	40mm	DOL/SD		2500	2150	2050	1670	1325	1064	650	300	150	0/33			
4	4TN20	20	15	100mm	50mm	SD		2650	2450	2300	2000	1900	1750	1400	1000	850	500	250	0/42	
5	4TN25	25	18.7	100mm	50mm	SD		2775	2600	2470	2300	2100	1900	1800	1400	1200	1000	650	150	0/46
6	6TN30	30	22.5	150mm	70mm	SD				4800	4500	3600	3000	2200		1000	300	0/38		
7	6TN40	40	30	150mm	70mm	SD/ATS				5800	5100	4600	3700	3700		1550	800	300	0/42	
8	6TN50	50	37.5	150mm	70mm	SD/ATS				6200	5500	5000	4500	4500		2500	1900	1000	500	0/47

APPLICATIONS:-

Basements, Hotels, Swimming Pools, Ponds, STP, ETP, Water Treatment Plants, Dairy, Excavation, Tunnels, Pond, River, Canal, Chemical Industries, Food Beverages, Railway, Municipality, Construction Sites, Pits, Farm House, Utility

KEY FEATURES OF OUR PUMPS

- Very Durable (Long Lasting Quality)
- Easily Repairable
- Easy Installation
- Safe
- Effective Working in Acrimonious Condition
- We also provide custmize Product by changing its's MOC like SS316, SS304, Aluminium , Hi-Chrome Etc. Agitator and Cutter Model Available on request.





TH SERIES HEAVY-DUTY NON-CLOG SEWAGE SUBMERSIBLE PUMP

KEY SPECIFICATIONS

- Horse Power (HP) :- 5 to 60 HP
- Rotational Speed :- 1440RPM
- 3 Phase Only

PERFORMANCE CHART OF TN SERIES

HEAVY-DUTY NON-CLOG SEWAGE SUBMERSIBLE PUMP 1440 RPM

Sr. No.	Model	HP	KW	Delivery Outlet	Solid Hanging capacity	Conn ection	HEAD IN METER													
								2	4	6	8	10	12	15	18	20	23	25	30	35
1	4TH5	5	3.7	100mm	60mm	DOL		2037	1468	1455	1333	1005	595	0/13						
2	4TH7.5	7.5	5.6	100mm	75mm	DOL/SD		2352	2208	1992	1728	1536	1056	566	0/15					
3	4TH10	10	7.5	100mm	75mm	DOL/SD		2500	2320	2205	1960	1764	1372	2230	294	0/19				
4	4TH15	15	11.2	100mm	75mm	DOL/SD	DISCHARGE IN LPM				3072	2760	2544	2160	1728	1536	672	0/24		
5	4TH20	20	15	150mm	85mm	SD		5568	5356	4944	4732	4270	3800	3390	2850	2190	1510	0/22		
6	6TH25	25	18.7	150mm	85mm	SD		5800	5420	5020	4780	4330	3880	3470	2900	2240	1555	0/24		
7	6TH30	30	22.5	150mm	85mm	SD			6000	5770	5290	4600	4070	2950	2520	2370	1650	1160	0/29	
8	6TH35	35	26.2	150mm	85mm	SD/ATS			7370	6596	6256	5500	5090	4650	4400	4260	3100	2470	0/29	
9	6TH40	40	30	150mm	95mm	SD/ATS					7370	6600	6250	5500	5090	4700	4365	3770	2950	820
10	6TH50	50	37.5	150mm	95mm	SD/ATS							7770	7200	5850	5350	4940	4030	3360	1530
11	6TH60	60	45	150mm	95mm	SD/ATS						9900	9400	8200	7800	7400	6500	5200	2840	

APPLICATIONS:-

Removal of Bentonite Slurry, Silica-Sand Slurry, Power Plant Ass Slurry, STP and ETP Sludge, In Excavation, In Desilting, In Well Cleaning, In Mines, In Tunnels , In Basement of Buildings, In Construction Sites etc.





TranspumpServ
GLOBAL PVT LTD

TECHNICAL SPECIFICATIONS

- Flow Rate: Up to 10,000 LPM
- Max. Head: Up to 60 meter
- Temperature: 45°C
- Delivery Outlet: 50mm to 150mm
- Solid Handling Capacity: 25mm to 100mm
- Connection: DOL, Star-Delta or ATS
- Supply: 415 Volts in 3 Phase and 230 Volt in Single phase with 50Hz Frequency
- Insulation: 'F' Class
- Protection: IP68

Cable: Double Sheathed Flexible Copper PVC Insulated Cable (10 Metre Standard)

- Mechanical Seal: Bi-Directional Twin Mech. Seal of Silicon Faces (Standard)
- Material Of Construction (MOC) Standard:
- Cast Iron 260FG: (Top cover, Bearing Cover, motor Body, Casing, Wear Plate, Stand, Oil Chamber, Flange, Seal Plate, impeller)
- SS410 : (Shaft)
- SS202 : (Hardware)

Customize Parts: All Casting Parts Can be in SS304 or SS316, Fully SS Pumps, Mech. Seal Rubber in nitrile or Whiton and Faces in Silicon, Tungsten, Ceramic or Carbon Depends on Applications.

STREAMLINED - RESILIENT - PROTECTED - EXPERT PUMP SOLUTIONS

INDIA

- 📍 Transpumpserv Global (HQ)
Vadodara - Gujarat, INDIA
- 📍 Transpumpserv Engineering
(Mfg. Unit -1) Valod - Surat, INDIA



SCAN ME

CANADA

- 📍 Transpumpserv Canada (SO)
Toronto - Canada

☎ +91 7016539529

✉ info@transpumpservglobal.com 🌐 www.transpumpservglobal.com

Follow us :   